

PUSH BUTTON WITH PNEUMATIC TIME DELAY




In or Out... we make it Easy!

SWITCH INFORMATION

Time Adjustment Procedure:

Use fingers to turn the brass adjustment screw.
 Turn clockwise to increase the delay
 Turn counter clockwise to decrease delay.

Like all pneumatic switches, time delays are approximate and can be affected by environmental variables. If in doubt, leave a longer delay to allow sufficient egress time.

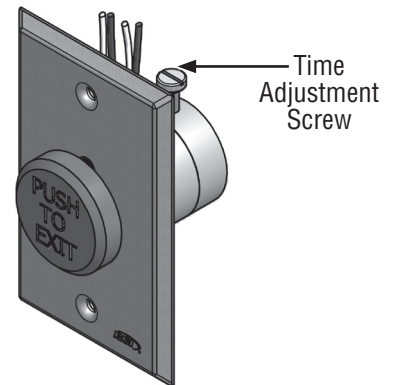

The adjustment screw may be facing up or down.

SPECIFICATIONS


TIME RANGE	2 sec to 60 sec +/- 15 %
REPEAT ACCURACY	+/- 5 % @ 72° F. (22° C)
SWITCH RATING	5 Amp @ 125 VAC
TEMPERATURE RANGE	-17° F to +120° F (-27° C to +49° C)
TIMER LIFE	1 Million operations

HARDWARE INSTALLATION

The 991 mounts in a single-gang electrical box with two screws. Slotted screws require a standard screw driver. Carefully line up these screws with tabs in the electrical box and tighten.

TYPICAL SYSTEM CONTROL WIRING DIAGRAMS

ELECTROMAGNETIC LOCK, NORMALLY CLOSED CIRCUIT

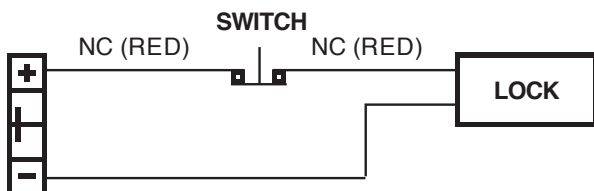

ELECTRIC STRIKE, NORMALLY OPEN CIRCUIT

